

6 Colors | 1 Size | 2 Deco | 1 Finish

MEMORY OAK WOOD PORCELAIN

NEMO
TILE + STONE

MEMORY OAK

Porcelain

Inspired by the organic beauty of oak wood, Memory Oak is a porcelain tile collection designed to create serene, spacious environments that exude warmth and tranquility, evoking a spa-like ambiance.

The collection showcases a full spectrum of natural colors, beautifully capturing the soft, wavy patterns of veins and knots on a smooth, tactile surface. Its innovative technology imparts each tile with a subtle three-dimensional texture, authentically replicating the look and feel of real wood.

V2 Variation





MOKA




CARAMEL



ASH



VANILLA

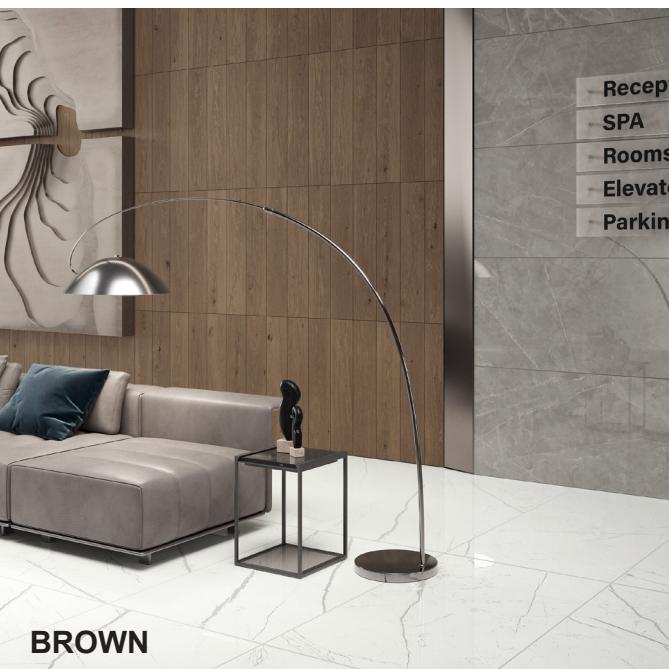

BROWN



WHITE

Memory Oak is available in three distinct field tiles: the classic 8" x 40" plank, a refined 8" x 40" chevron plank that mirrors the precision and elegance of the finest wood flooring, and a uniquely grooved 8" x 40" Spa plank that exudes soothing, spa-like tranquility.

8"x40" Matte  9 mm

Matte DCOF ≥ 0.42 Interior Wet (IW)



WHITE



CARAMEL



ASH



BROWN



VANILLA



MOKA



Chevron
8"x 40"
RECTIFIED



Spa
8"x 40"
RECTIFIED

Technical Information

Size 7³/₄" x 39³/₈" Thickness ± 9 mm F inish Matte

V2 SLIGHT VARIATION

Field tiles	Commercial size (in)	Nominal size (in)	Thickness (mm)	Finish	Edge
	8" x 40"	7 ³ / ₄ " x 39 ³ / ₈ "	9 mm	MatteR	rectified
	8" x 40" Chevron	7 ³ / ₄ " x 39 ³ / ₈ "	9 mm	MatteR	rectified
	8" x 40" Spa	7 ³ / ₄ " x 39 ³ / ₈ "	9 mm	MatteR	rectified

Please refer to caliber chart for working size. Close joints are not recommended.

Property	Test Method	Requirements	
		C	R
Regularity characteristics			

Regularity characteristics	Nominal Size	ASTM C499	±3.00%	-3.00% + 2.00%	compliant
	Caliber Range		±0.50% or ±0.08 in (±2.0 mm) (*)	±0.25% or ±0.03 in (±0.8 mm) (*)	compliant
	Thickness ⁽¹⁾		Range: 0.04 in (1.02 mm)		
	Wedging	ASTM C502	±0.50% or ±0.08 in (±2.0 mm) (*)	±0.25% or ±0.03 in (±0.8 mm) (*)	compliant
	Warpage Edge	ASTM C485	±0.75% or ±0.09 in (±2.3 mm) (*)	±0.40%C	compliant
	Warpage Diagonal		±0.50% or ±0.08 in (±2.0 mm) (*)	±0.40% or ± 0.07 in (±1.8 mm) (*)	compliant

Structural characteristics	 Water Absorption	ASTM C373	≤ 0.5% ≤	0.5%
----------------------------	--	-----------	----------	------

Bulk mechanical characteristics	 Breaking Strength A	STM C648	Average ≥ 250 lbf. (1.11 kN) Individual ≥ 225 lbf. (1.00 kN)	≥ 350 lbf. avg
---------------------------------	---	----------	---	----------------

Physical properties	 Bond Strength	ASTM C482	50 psi. (0.34 Mpa)≥	100 psi.
---------------------	---	-----------	---------------------	----------

Thermal and hygroscopic characteristics	 Resistance to Freeze/Thaw Cycling	ASTM C1026	As Reported	resistant
	 Thermal Shock Resistance	ASTM C484A	s Reported	Resistant

Chemical characteristics	 Chemical Resistance	ASTM C650A	s Reported	Unaffected
	 Stain Resistance	ASTM C1378	As Reported	Unaffected

Safety characteristics	 Dynamic Coefficient of Friction (DCOF)	ANSI A326.3A	s Reported ⁽²⁾	≥ 0.42 Wet Interior Wet (IW) ⁽²⁾
------------------------	--	--------------	---------------------------	---


STOCKED IN
• All Colors

NEMO
TILE + STONE

Sizes



8"x40"



8"x40"



8"x40"

Sustainability Certifications



Declare.



MEMORY OAK
Wood Porcelain