

5 Colors | 3 Size | 2 Deco | 2 Finish

BEYOND CALACATTA MARBLE PORCELAIN

NEMO
TILE + STONE

BEYOND CALACATTA

Porcelain

Beyond Calacatta is a porcelain tile collection inspired by the timeless elegance of Calacatta marble. It features angular veining that beautifully mimics the unique characteristics of this luxurious stone. Available in five stunning colors, including a foundational black, an elegant warm gray, and three variations of white with veining in neutral tones, this collection showcases an extraordinary commitment to capturing the intricate veins of Calacatta marble, adding movement and depth to any design. This series seamlessly fits a variety of interior aesthetics, creating contemporary, modern spaces that are also sustainable.

V2 Variation

NEMO
TILE + STONE





CLASSIC WHITE



OCEAN WHITE



GLAM WHITE



GRAY



PICKET MOSAIC




3D ETCH & MOSAIC



BLACK

Beyond Calacatta is available in four distinct field tiles: 23 5/8"x 47 1/4", 11 3/4"x 23 5/8", and a 11 3/4"x 23 5/8" groove format. It also includes two decor mosaics in a 11 3/4"x 11 3/4" and a 12 2/7"x 11 5/7" format in a matte finish. This is a full collection for floor and wall applications.

Matte ∇ 9 mm | Polished ∇ 9 mm DCOF - Matte 9 mm \geq 0.42 Wet | Interior Wet (IW) | Polished 9 mm \geq 0.42 Dry | Interior Dry (ID)

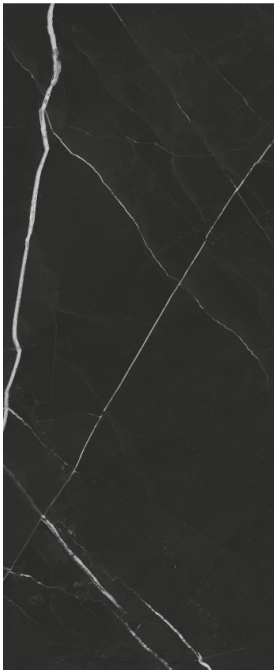

BLACK



GRAY



GLAM WHITE




OCEAN WHITE




CLASSIC WHITE


3D ETCH

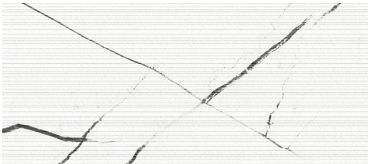

Glam White


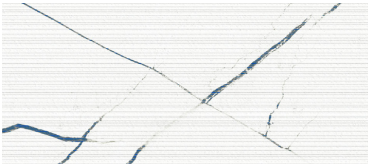


Ocean White

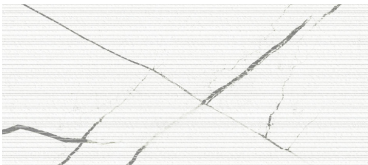


Classic White



11 3/4"x 23 5/8"
RECTIFIED
 ∇ 9 mm



Mosaic
11 3/4"x 11 3/4"
Matte
 ∇ 9 mm



Picket Mosaic
12 2/7"x 11 5/7"
Matte
 ∇ 9 mm



V2 SLIGHT VARIATION

Technical Information



| | | | | | |
|--------------------------------|----------------------|-------------------|----------------|-----------------|-----------------------------------------------------------------------------------|
| Field tiles | Commercial size (in) | Nominal size (in) | Thickness (mm) | Finish | Edge |
| | 12" x 24" | 1 13/4" x 23 5/8" | 9 mm | Matte | Rectified |
| | 3D Etch | 1 13/4" x 23 5/8" | 9 mm | Matte | Rectified |
| | 24" x 48" | 23 5/8" x 47 1/4" | 9 mm | Matte, Polished | Rectified |
| Mosaics and coordinating trims | Commercial size (in) | Nominal size (in) | Thickness (mm) | Finish | Please refer to caliber chart for working size. Close joints are not recommended. |
| | Mosaic 2" x 2" | 1 13/4" x 1 13/4" | 9 mm | Matte | |
| | Picket Mosaic | 12 2/7" x 1 15/7" | 9 mm | Matte | |
| | Bullnose 3" x 24" | 2 7/8" x 23 5/8" | 9 mm | Matte, Polished | |
| | Cove Base 6" x 12" | 5 7/8" x 1 13/4" | 8.5 mm | Matte | |

| | | | Requirements | | | | |
|-----------------------------------------|---------|----------------------------------------|----------------------------------|-----------------------------------------------------------------|----------------------------------|---------------------------------------------|---------------------------------------------|
| Property | | Test Method | Calibrated | Rectified | | | |
| Regularity characteristics | | Nominal Size | ASTM C499 | ±3.00% | -3.00% ÷ +2.00% | Compliant | |
| | | Caliber Range | | ±0.50% or ±0.08 in (±2.0 mm) (*) | ±0.25% or ±0.03 in (±0.8 mm) (*) | Compliant | |
| | | Thickness ⁽¹⁾ | | Range: 0.04 in (1.02 mm) | | Compliant | |
| | Wedging | ASTM C502 | ±0.50% or ±0.08 in (±2.0 mm) (*) | ±0.25% or ±0.03 in (±0.8 mm) (*) | Compliant | | |
| | | Warpage Edge | ASTM C485 | ±0.75% or ±0.09 in (±2.3 mm) (*) | ±0.40% | Compliant | |
| | | Warpage Diagonal | | ±0.50% or ±0.08 in (±2.0 mm) (*) | ±0.40% or ±0.07 in (±1.8 mm) (*) | Compliant | |
| Structural characteristics | | Water Absorption | ASTM C373 | ≤ 0.5% | | ≤ 0.5% | |
| Bulk mechanical characteristics | | Breaking Strength | ASTM C648 | Average ≥ 250 lbf. (1.11 kN) Individual ≥ 225 lbf. (1.00 kN) | | ≥ 350 lbf. avg | |
| Physical properties | | Bond Strength | ASTM C482 | ≥ 50 psi. (0.34 Mpa) | | ≥ 100 psi. | |
| Thermal and hygrometric characteristics | | Resistance to Freeze/ Thaw Cycling | ASTM C1026 | As Reported | | Resistant | |
| | | Thermal Shock Resistance | ASTM C484 | As Reported | | Resistant | |
| Chemical characteristics | | Chemical Resistance | ASTM C650 | As Reported | | Unaffected | |
| | | Stain Resistance | ASTM C1378 | As Reported | | Unaffected | |
| | | | | | | Matte | Polished |
| Safety characteristics | | Dynamic Coefficient of Friction (DCOF) | ANSI A326.3 | As Reported ⁽²⁾ | | ≥ 0.42 Wet Interior Wet (IW) ⁽²⁾ | ≥ 0.42 Dry Interior Dry (ID) ⁽²⁾ |

STOCKED IN
• All Colors

NEMO
TILE + STONE

Sizes

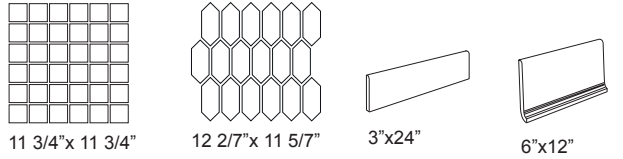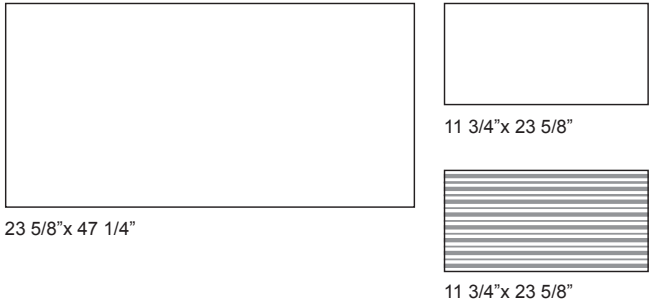

V2 SLIGHT VARIATION

Sustainability Certifications



BEYOND CALACATTA
Marble Porcelain