

4 Colors | 4 Sizes | 2 Mosaic | 2 Finishes

# APOLLO

Porcelain



**NEMO**  
TILE + STONE




Darkside




Comet Cream



Comet Cream

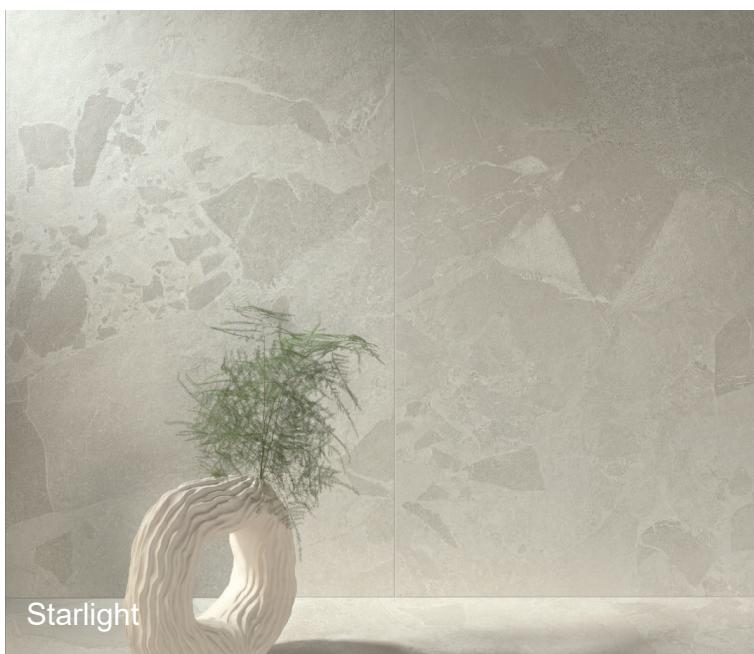


Starlight

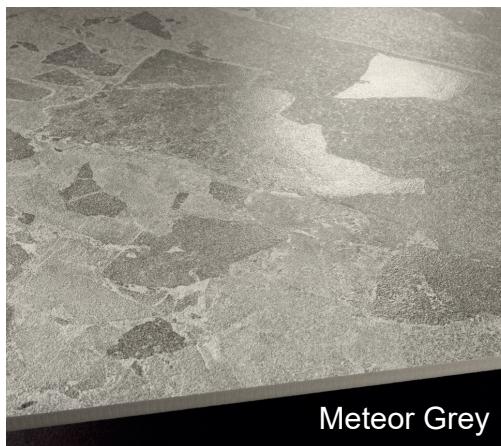

Meteor Grey



Meteor Grey

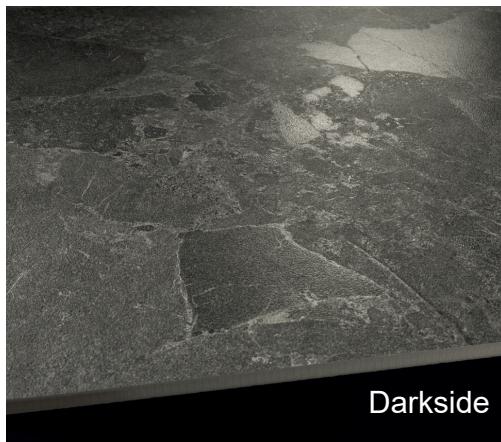

Darkside



# APOLLO

V2 Variation

Inspired by the celestial elegance of the cosmos, Apollo reimagines the classic appearance of the Ceppo di Gres stone, infusing it with an innovative and sophisticated twist. Its top-quality and versatile finishes adapt effortlessly to various surfaces, featuring synchronized reflections that blend harmoniously with any environment. Boasting four vibrant colors and eye-catching mosaics Apollo sets a fresh benchmark for the fusion of natural beauty with design. Available in four colors; 48"x48", 24"x24", 24"x48", and 12"x24" format, and two mosaics styles, tessera and triangles. The flawless design of Apollo, complemented by its dual finish, positions it as an optimal tile selection for both commercial and residential settings.



**Comet Cream**

Natural



R11



**Darkside**

Natural



R11



**Meteor Grey**

Natural



R11



**Starlight**

Natural



R11

**Mosaic Tessera** 2"X2" on 12"X12" sheet



Comet Cream



Darkside




Meteor Grey




Starlight


**Mosaic Triangles** 101/4"x12" sheet




Comet Cream



Darkside




Meteor Grey



Starlight


# Apollo Porcelain - Technical Information

 UNI EN ISO 10545-2	Surface Appearance	≥ 95%	Compliant	
	Length and width	Deviation of the average size for each tile from the work size (%). ≥ 410 cm <sup>2</sup> +/- 0,6% - ≤ 410 cm <sup>2</sup> +/- 0,75%	± 0,5% ± 1,5 mm	
		Deviation of the average size for each tile from the average size to the 10 test specimens (%). +/- 0,5%	± 0,5% ± 1,5 mm	
	Straightness of Sides	+/- 0,5%	± 0,3% ± 1,5 mm	
	Thickness	+/- 5%	± 5% ± 0,5 mm	
	Rectangularity	+/- 0,5%	± 0,3% ± 1,5 mm	
	Surface Flatness	+/- 0,5%	± 0,5% ± 1,5 mm	
 UNI EN ISO 10545-3	Water Absorption	≤ 0,5% GRUPPO Bla GL	E ≤ 0,1%	
 UNI EN ISO 10545-4	Scratch Hardness (MOHS scale)	EN 101	> 6	
 UNI EN ISO 10545-4	Modulus of Rupture & Breaking Strength	S ≥ 1300 N	S ≥ 1300 N	
		R ≥ 35 N/mm <sup>2</sup>	R ≥ 35 N/mm <sup>2</sup>	
 UNI EN ISO 10545-7	Resistance to Surface Abrasion	See manufacturer's declaration	Class 3-4	
 UNI EN ISO 10545-8	Linear Thermal Expansion Coefficient	See manufacturer's declaration	Method available	
 UNI EN ISO 10545-9	Thermal Shock Resistance	No sample must show visible alteration	Resistant	
 UNI EN ISO 10545-12	Frost Resistance	No sample must show visible defect	Frost proof	
 UNI EN ISO 10545-13	Resistance to Chemical Attack	No sample must show visible alteration	Class A-HA-LA	
 UNI EN ISO 10545-14	Stain Resistance	No sample must show visible alteration	Class 5	
 B.C.R.A. REP.C.6/81 DIN 51130 DIN 51097 B00 Pendulum AS 4586 Pendulum BS 7976	Skid Resistance Average Coefficient of Friction	B.C.R.A. REP. CEC. 6/81	0,40 ≤ ≤ 0,74	
		DIN 51130 ≥ R 9	R10	R11
		DIN 51097	Class B	Class C
		DCOF	≥ 0,42	
		Pendulum Australiano AS 4586	R10: Class P3	R11: Class P4
		Pendulum Britannico BS 7976	PTV > 36 wet	

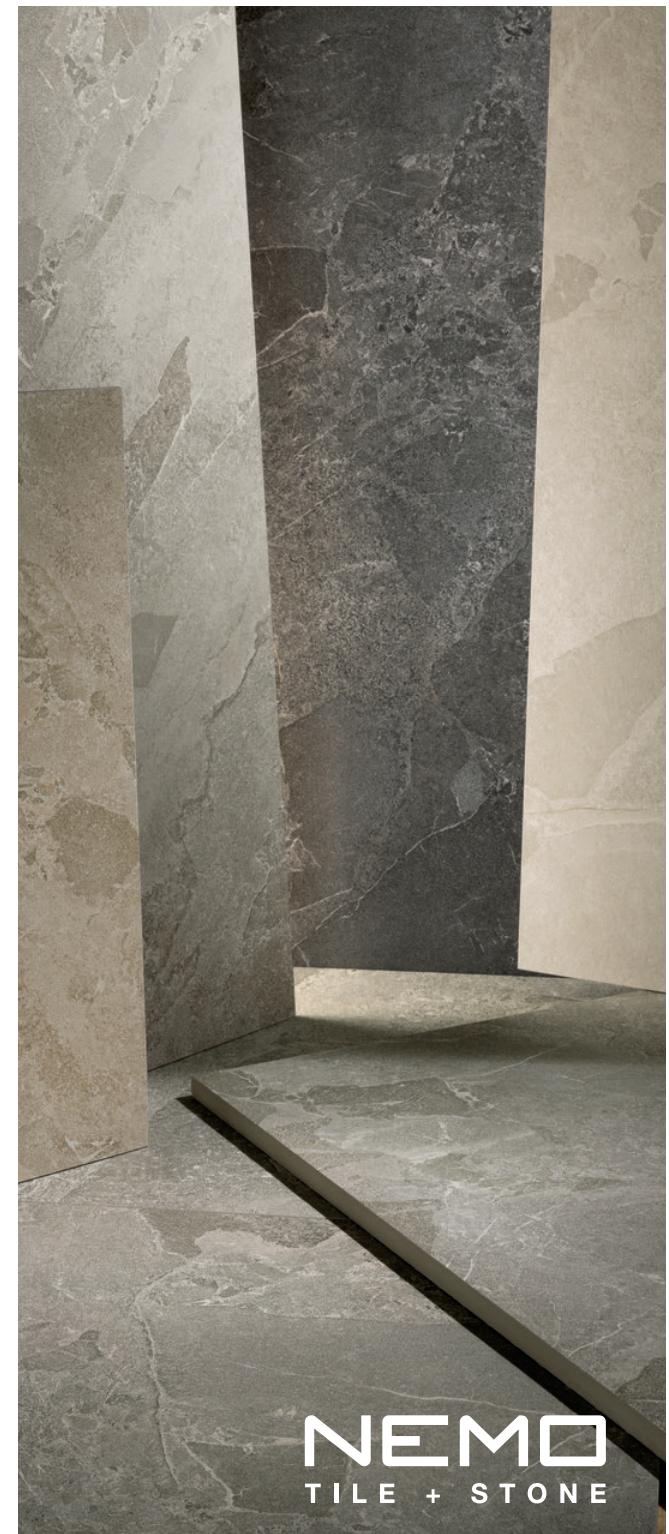

**NEMO**  
TILE + STONE

## Sizes

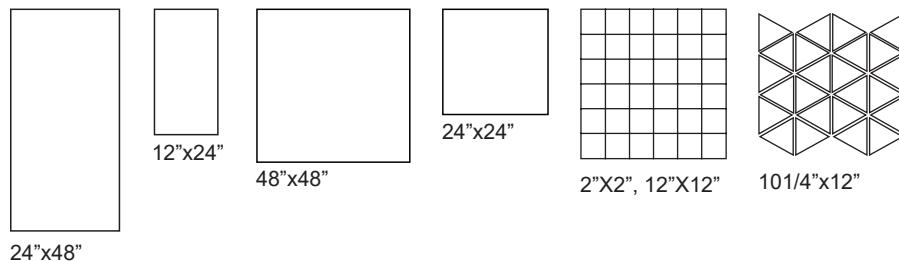

## Carton Qty

Size 9.5 mm	Pcs/Box	SF/Box	Weight/Box
48"x48"	1	15.50	68.34
24"x48" R11	2	15.50	68.34
24"x24" R11	3	11.60	50.26
12"x24" R11	6	11.60	50.26
<b>Size 2 cm</b>			
24"x48" R11	1	7.75	71.20

## Availability

Stocked in **3 Sizes | 3 Colors**

2x2, 12x24, 24x48 | Darkside, Meteor Grey, Starlight

	R10	R11	A+B+C 20 MM	V2	9.5 MM 30 MM	20 MM 30 MM
<b>Sizes</b>						
12x120 48"x48" RETT thickness 9,5 mm	<input type="checkbox"/>					
60x120 24"x48" RETT thickness 9,5 mm	<input type="checkbox"/>					
60x120 R11 24"x48" RETT thickness 9,5 mm	<input type="checkbox"/>					
60x60 24"x24" RETT thickness 9,5 mm	<input type="checkbox"/>					
60x60 R11 24"x24" RETT thickness 9,5 mm	<input type="checkbox"/>					
<b>COMET CREAM</b>						
DARKSIDE	<input type="checkbox"/>					
METEOR GREY	<input type="checkbox"/>					
STARLIGHT	<input type="checkbox"/>					
<b>Sizes</b>						
30x60 12"x24" RETT thickness 9,5 mm	<input type="checkbox"/>					
30x60 R11 12"x24" RETT thickness 9,5 mm	<input type="checkbox"/>					
60x120 R11 24"x48" RETT thickness 20 mm	<input type="checkbox"/>					
<b>COMET CREAM</b>						
DARKSIDE	<input type="checkbox"/>					
METEOR GREY	<input type="checkbox"/>					
STARLIGHT	<input type="checkbox"/>					
<b>Mosaics</b>						
MOSAICO TESSERA 5x5 2"x2" 30x30 12x12" RETT thickness 9,5 mm	<input type="checkbox"/>					
MOSAICO TRIANGOLI 26x30 10 1/4" x12" RETT thickness 9,5 mm	<input type="checkbox"/>					
<b>COMET CREAM</b>						
DARKSIDE	<input type="checkbox"/>					
METEOR GREY	<input type="checkbox"/>					
STARLIGHT	<input type="checkbox"/>					
<b>Trims</b>						
BATTISCOPA 6,5x60 2 1/2" x24" RETT thickness 9,5 mm	<input type="checkbox"/>					
GRADONE COSTA RETTA 30x120x3,3 12"x48" x 1 1/8" RETT thickness 9,5 mm	<input type="checkbox"/>					
GRADONE SQUARE ASSEMBLATO 30x120x3,3 12"x48" x 1 1/8" RETT thickness 9,5 mm	<input type="checkbox"/>					
<b>COMET CREAM</b>						
DARKSIDE	<input type="checkbox"/>					
METEOR GREY	<input type="checkbox"/>					
STARLIGHT	<input type="checkbox"/>					