


34 Colors | 7 Sizes | 1 Finish

ART SCAPE UNGLAZED MOSAIC



NEMO
TILE + STONE

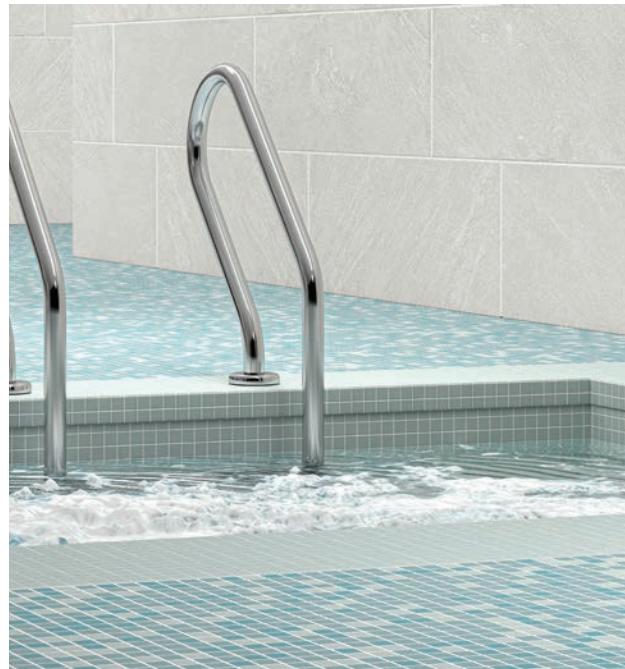

NEMO
TILE + STONE

ART SCAPE
UNGLAZED PORCELAIN MOSAIC

V2 Variation (Solid Colors) |
V4 Variation (Speckled Colors,
Random Blends)

ART SCAPE

Always a classic, Artscape Porcelain Mosaics provide unlimited options for virtually any space. From sophisticated neutrals to saturated deep tones to crisp, contemporary brights, the palette delivers a timeless and trendy color lineup. The size and shape options complete the design story, while standard and custom pattern options offer true freedom of expression



Installation

Grout Joint Recommendation	Shade Variation
1/8" Approximately	 Medium (V2) (Solid Colors)  Random (V4) (Speckled Colors, Random Blends)

Performance Characteristics

	ASTM#	Mosaic Result
Water Absorption	C373	< 0.5 %
Breaking Strength	C648	> 300 lbs
Scratch Hardness	MOHS	7.0 - 8.0
Chemical Resistance	C650	Resistant

Applications

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	●
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.55	●*
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●
Pool Tanks / Submerged applications	N/A	●**

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™


APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Unglazed mosaics have recurrent grout joints and reflect DCOF of ≥ 0.55 wet making them suitable for these applications.

** Unglazed mosaics with ClearFace™ mounting system recommended for pool tanks and submerged applications.

Sizes

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	2 x 2 Mosaic (Dot-mounted)	2" x 2" Piece (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12
	1 x 1 Mosaic (Dot-mounted)	1" x 1" Piece (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12
	2" Hexagon Mosaic (Dot-mounted)	2" x 2" Piece (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"	24.24	12
	1" Hexagon Mosaic* (Dot-mounted)	1" x 1" Piece (12" x 22-5/8" Sheet) (30.48 cm x 58.10 cm Sheet)	1/4"	21.00	12
	2 x 1 Straight-joint Mosaic (Dot-mounted)	2" x 1" Piece (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12
	2 x 1 Brick-joint Mosaic (Dot-mounted)	2" x 1" Piece (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"	22.00	12
	Penny Round Solid Colors (Dot-mounted)	1" x 1" Piece (10" x 22" Sheet) (25.40 cm x 55.88 cm Sheet)	1/4"	21.12	12

Durability

Floor Surface Wear Resistance

1 Residential Bathrooms 2 All Residential Areas 3 All Residential / Light Commercial 4 All Residential / Commercial

Features



PRE-CONSUMER
RECYCLED MATERIALS



MADE IN THE U.S.A.



CERTIFIED
PORCELAIN TILE
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications.

Usage

