


8 Colors | 4 Mosaics | 1 Finish

PASTELLI
PORCELAIN MOSAICS





NEMO
TILE + STONE

PASTELLI

A timeless favorite reimagined, Pastelli returns with a sophisticated new expression: the 1×1" hexagon mosaic. Expanding upon the beloved series of classic squares and rectangles, this hexagonal addition brings a contemporary geometry to a collection known for its subtle beauty and exceptional performance.

Crafted in full-body porcelain stoneware, Pastelli unites refined craftsmanship with modern innovation. Its soft matte finish and delicate palette of neutrals and muted pastels evoke a sense of calm harmony, perfect for serene, modern interiors. Designed for both indoor and outdoor applications, including pools, spas, and high-traffic spaces, Pastelli embodies function made beautiful. Each mosaic offers a tactile surface that feels handcrafted yet enduring, transforming simple arrangements into timeless design statements.





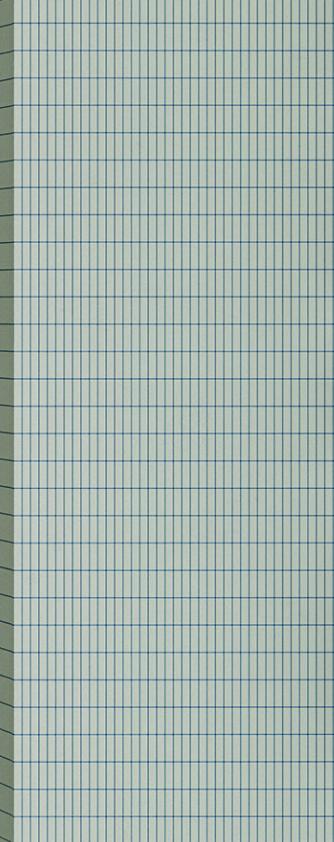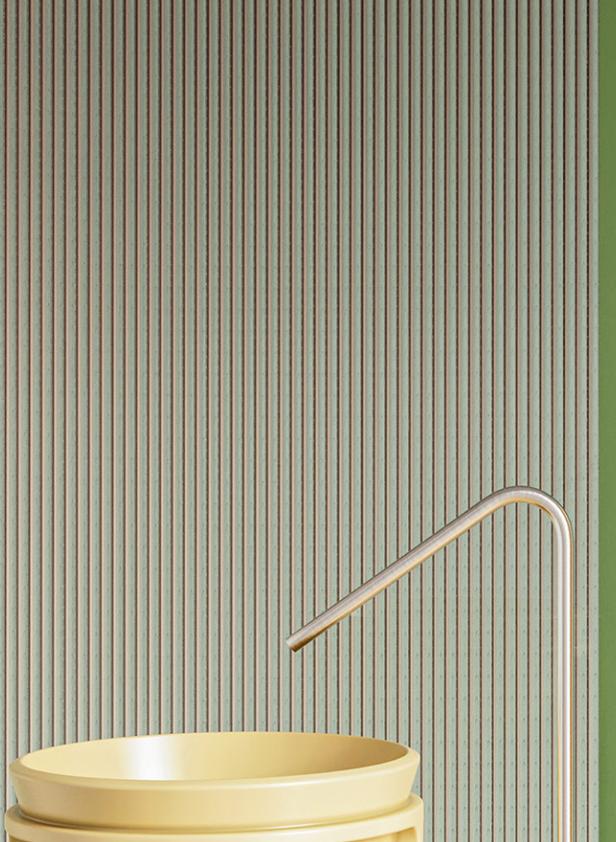

RUSCELLO

Why We Love It

- **Design evolution:** A fresh hexagon format enriches the Pastelli story with dimensional geometry and modern elegance.
- **Enduring performance:** Full-body porcelain ensures color depth and longevity.
- **Soft tonal palette:** Balanced neutrals and contemporary pastels channel serenity and warmth across any surface.
- **Exceptional versatility:** Suited for walls, floors, pools, and exterior applications, blending beauty with performance.
- **Matte refinement:** The smooth yet textural finish adds quiet sophistication to residential and hospitality settings alike.

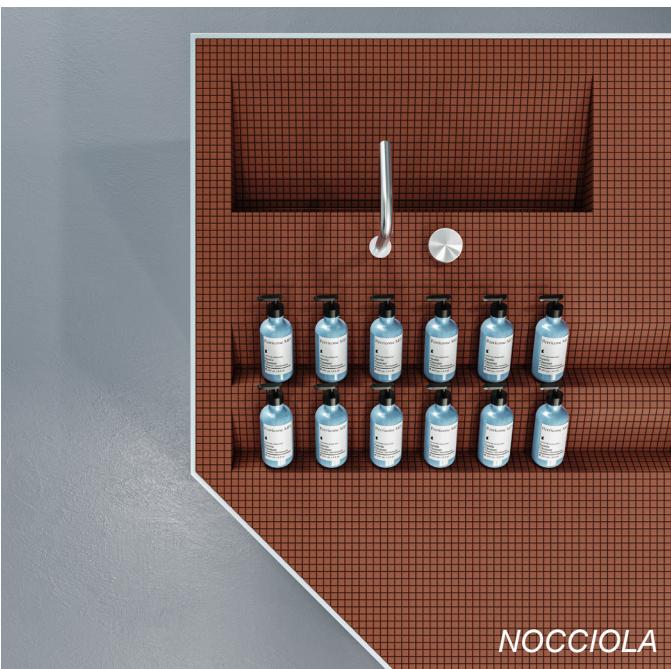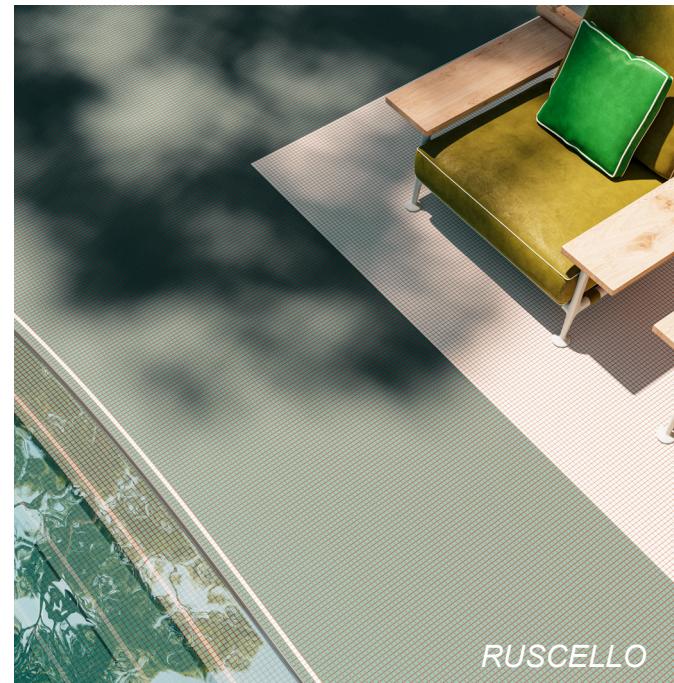

COLORS

Pastelli is available in 8 colors in a matte finish in 4 mosaic options: 1/2x1 1/2 rectangles, 1/2x1/2 squares, 1x1 squares, and 1x1 hexagons. Suitable for wall and floor applications in interior and exterior spaces. Pastelli is available for special order only.



Osso



Ostrica



Cenere




Antracite




Conchiglia



Nocciola




Ruscello

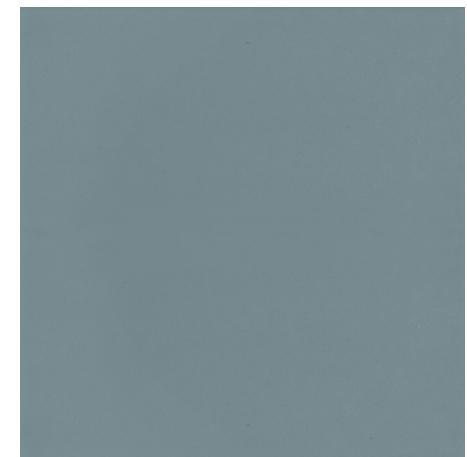


Aurora

Sizes

30 x 30 cm / 12" x 12"




30 x 30 cm / 12" x 12"




1.25 x 1.25 cm
1/2" x 1/2"

30 x 30 cm / 12" x 12"



1.25 x 3.75 cm
1/2" x 1 1/2"


30 x 30 cm / 12" x 12"



2.5 x 2.5 cm
1" x 1"



2.5 x 2.8 cm
1" x 1 7/64"



Sustainability



LEED CREDITS

Products with this designation may help building projects earn LEED® certification points for environmental responsibility.



EPD AVAILABLE

An EPD transparently details its environmental impact across its life cycle, from raw material extraction to manufacturing, use, and end-of-life.



ZERO VOC

Zero VOC indicates that no volatile organic compounds are present, contributing to healthier indoor environments.

Technical Information

PROPERTY	STANDARD	TOLERANCE	RESULT
Sides	ISO 10545-2	+/- 0.5%	+/- 0.2%
Thickness 7.2mm	ISO 10545-2	+/- 5%	+/- 4%
Surface Qualities	ISO 10545-2	<95%	<95%
Straightness of edges	ISO 10545-2	+/- 0.5%	+/- 0.4%
Squareness	ISO 10545-2	+/- 0.5%	+/- 0.4%
Water absorption	ISO 10545-3	E<0.5% Appendix G	<0.5%
Breaking Strength (N)	ISO 10545-4	700 min. Appendix H	>1800 N
Breaking strength (Lbf)	ASTM C648	>250 lbf	>250 lbf
Bending Strength (N/mm²)	ISO 10545-4	30 min. Appendix G	> 50 N/mm²
Impact resistance	ISO 10545-5	Testing method available	>0.6 Appendix P
Abrasion resistance	ISO 10545-7	Indicated by producer	PEI V
Coefficient of linear thermal expansion	ISO 10545-8	Testing method available	<7x10^-6/C
Thermal shock resistance	ISO 10545-9/ASTM C484	Testing method available	Guaranteed
Moisture expansion	ISO 10545-10	Testing method available	< 0.04%
Crazing resistance	ISO 10545-11/ASTM C424	Required	Guaranteed
Frost resistance	ISO 10545-12/ASTM C1026	Required	Guaranteed
Resistance to chemical products for housekeeping and swimming pool additives	ISO 10545-13	B min.	A
Resistance to diluted acid and alkali solutions	ISO 10545-13	Indicated by producer	LA
Resistance to highly concentrated acid/alkali solutions	ISO 10545-13	Testing method available	HA
Stain resistance	ISO 10545-14	Class 3 min.	3min.
Resistance of colors to sunlight	DIN 511094	Not envisaged	Guaranteed
Fire resistance	-	Decision 96/603/ce	Class A1
Coefficient of friction	DIN 51130	-	R10
Coefficient of friction	DIN 51097	-	B
DCOF - 1/2"x1/2"	ANSI A137.1	>0.42	0.6
DCOF - 1"x1"	ANSI A137.1	>0.42	0.67
DCOF - 1"1 1/2"	ANSI A137.1	>0.42	0.78