

1 Colors | 3 Sizes | 1 Finish



YASMINE
Porcelain

NEMO
TILE + STONE



Bianco Maiolica 36"x36", 12"x36"



Bianco Maiolica 12"x36"



Bianco Maiolica 36"x36"




12x36 Bianco Maiolica Textured

Introducing Yasmine, the majestic Large-Scale Feature Tile, meticulously crafted to become the heart of any chic urban lobby or sky-high restaurant. This architectural marvel seamlessly integrates with any indoor or outdoor setting, making it a perfect complement to a beach abode as well. Bathed in natural light, our feature tile exhibits a unique fusion of plaster aesthetics and Zellige design, effortlessly guiding your gaze in a continuous journey, drawing attention upwards and offering a mesmerizing and immersive visual spectacle. Ideal for designers and architects looking for innovative solutions, Yasmine is an excellent tool to enhance spatial narratives.



Bianco Maiolica Textured
36"x36"

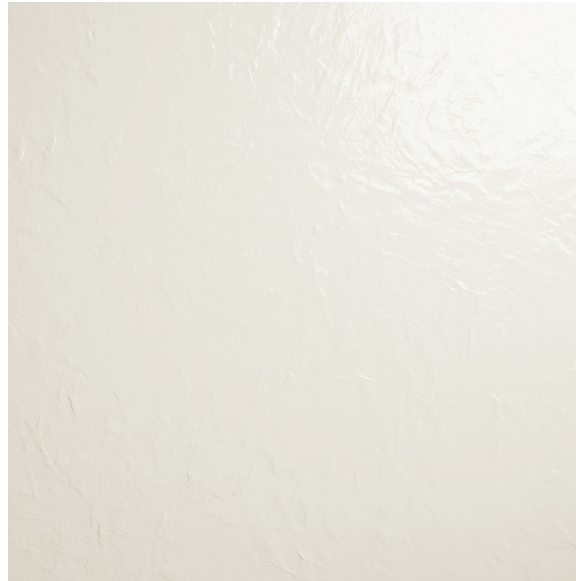


Bianco Maiolica
36"x36"



Bianco Maiolica
12"x36"










Bianco Maiolica Textured
12"x36"



Bianco Maiolica
12"x12"

Yasmine Porcelain - Technical Information

EN 14411:2012 ALLEGATO G GRUPPO BIa UGL


TECHNICAL FEATURE		TEST METHOD	REQUIRED STANDARDS
	Sizes and look of the tile	ISO 10545-2	<p>Length and width ±0,6% / ±2.0 mm</p> <p>Thickness ±5% / ±0.5 mm</p> <p>Straightness of sides ±0,5% / ±1.5 mm</p> <p>Rectangularity ±0,5% / ±2.0 mm</p> <p>Surface flatness ±0,5% / ±2.0 mm</p> <p>Surface quality: 95% of tiles with no defaults</p>
	Assorbimento d'acqua - Water absorption	ISO 10545-3	≤ 0,5 % (Maximum single value 0,6 %)
	ReAverage bending strength	ISO 10545-4	35 N/mm ² min. (Single value)
	Breaking strength	ISO 10545-4	Thickness ≥ 7,5 mm: 1300 N min. < 7,5 mm: 700 N min.
	Resistance to deep abrasion	ISO 10545-6	175 mm ³ max.
	Frost resistance	ISO 10545-12	Required
	Chemical resistance (Domestic use and swimming pool chemicals)	ISO 10545-13	UB min - Min. UB UB mind. - Min UB

SERIES	DIN EN 16165:2021 ANNEX B	DIN EN 16165:2021 ANNEX A	D.M. 14/06/89 N° 236 PAR. 8.2.2	DCOF ACUTEST SM ANSI A326.3
YASMINE	Naturale: R10	Naturale A+B	DRY: > 0,40 WET: > 0,40	Naturale: WET: ≥0.42

Technical characteristics for the Half-Polished surface available on request.



Sizes




36"x36"



12"x36"



12"x12"



Glossy/Rectified



NEMO
TILE + STONE

Carton Qty

Size 9.5 mm	Pcs/Box	SF/Box	Weight/Box
36"x36" 90,6x90,6	2	17.66	72.7415
12"x36" 30,2x90,6	6	17.66	79.364
12"x12" 30,2x30,2	12	11.76	46.2991

Availability

Stocked in 3 Sizes | 1 Color



36x36 | 12x36
Bianco Maiolica



12x36
Bianco Maiolica Textured

YASMINE
Porcelain