

2 Colors | 2 Sizes | 2 Finishes

BOTANICA PORCELAIN MOSAIC

Nemo Tile + Stone x Mutina

NEMO
TILE + STONE



Seed White Matte



Seed Grey Matte



Flower White Glossy



Glower Grey Matte

NEMO
TILE + STONE

BOTANICA
Porcelain Mosaic

BOTANICA

V1 Variation


Botanica features two elements inspired by nature: Seed, in 5"x6" format, and Flower, in 6"x7" format, both with a thickness of 9mm. The modules are sold exclusively on a 9"x15" mesh-mount - and are available in White and Grey, offered in a super glossy finish and a matte wax-coated finish which is extremely pleasant to the touch, and are suitable for floors and walls. This makes it possible to give the surfaces continuity and, in which the mosaic becomes more or less emphasized depending on the color of the grout.



Tokujin Yoshioka

"For the Botanica collection, I have created a design that expresses the beauty of nature in different forms, as if I were painting a landscape. Senses are a fundamental element of my creative process. Not only material and visual ones, such as touch and sight, but also more "abstract" ones, such as the sense of smell. I am constantly looking for something that is defined and perceived by all the five senses."


FLOWER

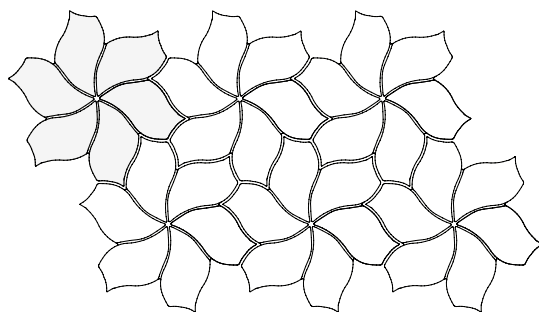


White Matte



White Glossy




Grey Matte



Grey Glossy

SEED

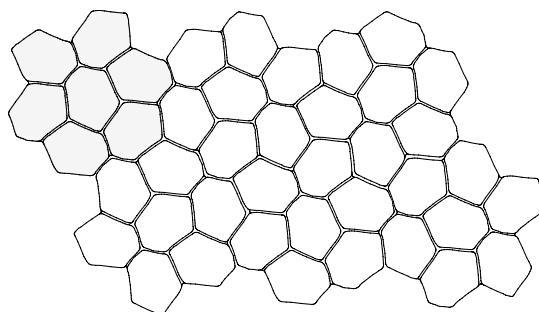


White Matte



White Glossy




Grey Matte




Grey Glossy

Size

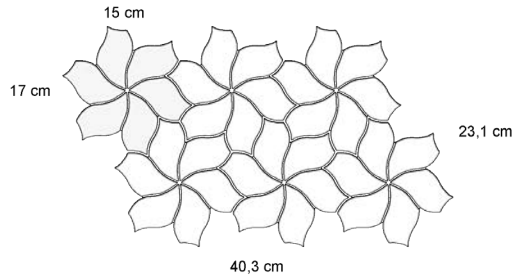

Flower
Mesh-mounted on 9"x15" sheet

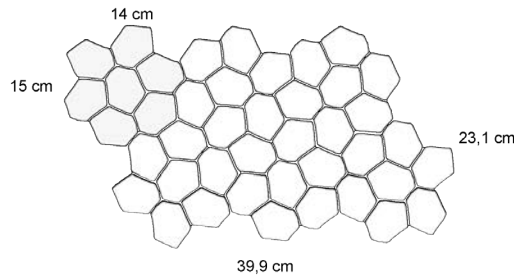

Seed
Mesh-mounted on 9"x15" sheet



Technical Information

STANDARD	FEATURES	VALUE REQUIRED	BOTANICA
ISO 10545/2	SIZES length and width thickness straightness of edges wedging flatness	$\pm 0,6\%$ $\pm 5\%$ $\pm 0,5\%$ $\pm 0,5\%$ $\pm 0,5\%$	in conformity with standard
ISO 10545/3	water absorption	$< 0,5\%$	0,2%
ISO 10545/4	breaking strength modulus of rupture	$\geq 1300 \text{ N}$ $\geq 32 \text{ N/mm}^2$	in conformity with standard
ISO 10545/9	resistance to thermal shock	comply requirements	resistant
ISO 10545/12	frost resistance	comply requirements	resistant
ISO 10545/13	resistance to acids and alkalis (low and high concentration) Resistance to household cleaning agents minimum class B and swimming pool chemicals	declared value	A A
ISO 10545/14	stains resistance	minimum class 3	5
DIN 51130			R9 matt
DIN 51097			B matt A glossy
DCOF		$> 0,42$	0,52 matt 0,31 glossy
PendulumBS (EN 16165-c)			55/25 matt dry/wet 57/23 glossy dry/wet
PendulumAS/NZS (4586313 app A)			26 P2 matt 23 P1 glossy
Pendulum ES (UNE 41901)			C1 matt/glossy
LEED CERTIFICATION 4.1			24%
VOC Emission			Available upon request
EPD			Available upon request
Declaration of Contents			Available upon request
SVHC declaration			Available upon request

Carton Qty

SIZE	PCS-SQM	PCS BOX	SQM BOX	BOX PAL	KG BOX	KG PAL	SQM PAL
Flower all colours net 40,3-23,1 cm	10,83	5	0,46	60	21,00	1260	27,60
Seed all colours net 39,9-23,1 cm	11,00	5	0,45	60	20,10	1206	27